



FALCON

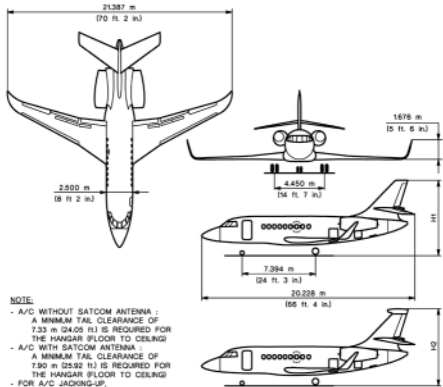

NOTE:
 - A/C WITHOUT SATCOM ANTENNA :
 A MINIMUM TAIL CLEARANCE OF
 7.33 m (24.05 ft) IS REQUIRED FOR
 THE HANGAR FLOOR TO CEILING
 - A/C WITH SATCOM ANTENNA
 A MINIMUM TAIL CLEARANCE OF
 7.90 m (25.92 ft) IS REQUIRED FOR
 THE HANGAR FLOOR TO CEILING
 - FOR A/C JACKING-UP,
 ADD 0.967 m (3.19 ft) TO THESE VALUES

CONFIGURATION	WT	HT	HT
	KG	FT LIGHT	SATCOM TP FARRING
MTOW	18,141 kg (40,200 lb)	6,990 m	7,047 m
MW	16,826 kg (37,000 lb)	6,283 m	6,340 m
MW	14,276 kg (31,479 lb)	7,015 m	7,072 m
MW	10,650 kg (23,479 lb)	6,283 m	6,340 m
MW AND N/G SHOCK ABSORBER DEFLATED	9,800 kg (21,614 lb)	6,283 m	6,340 m
MW AND N/G SHOCK ABSORBER DEFLATED	9,800 kg (21,614 lb)	6,283 m	6,340 m

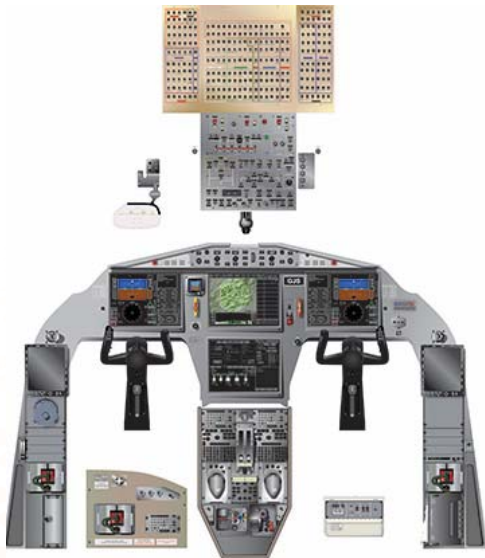

Falcon 2000 to Falcon 2000EX EASy/DX/LX/S

Aircraft Differences Maintenance

This course offers a sharply focused, detail-oriented comparison of similar aircraft models that require separate type ratings. The focus is on the systems that are significantly different between two aircraft models that otherwise share a large portion of other main systems in common.

The emphasis is on building upon what the student already knows about a particular aircraft model and filling the gaps relating to the new model.

This comprehensive class is the ideal way to introduce technicians to the aircraft within the fleet.

For more information on your Falcon 2000
 please contact:
Sales@globaljetservices.com
 30 Tower Lane →
 Avon, CT → 06001
 Tel (860) 651-6090 → Fax (860) 651-3618
globaljetservices.com

Course Length
 10 Days (80 Hours)

FAA IA Approval Code:

C-IND-IM-161031-K-010-003



Other GLOBALJET courses available for
 your Falcon 2000:

FAA Accepted
Falcon 2000 Gen-Fam
Falcon 2000 Line
Falcon 2000 Refresher
Falcon 2000 Electrical Interface

GLOBALJET
 SERVICES

